


Plastic cable glands

HSK-K-Flex (metric/long, PG/long)

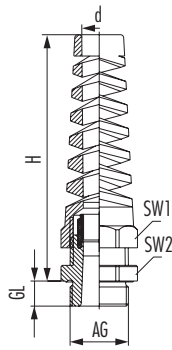


Material	Polyamide
Seal	NBR
Protection class	IP 68 – 10 bar / IP 69 K with additional o-ring
Temperature range	-40°C to +100°C
Colour	grey / black
RAL	7035 / 9005

RoHS

// With additional premounted O-ring on the connection thread on request
 // Other sealing material e.g. Silicone on request

AG	∅k mm	d mm	H mm	SW1/SW2 mm	⊕ Nm	GL mm	Item-No grey short	Item-No black short	GL mm	Item-No grey long	Item-No black long
M12 x 1.5	2 – 5	7	54	15/15	1.5	8	1.293.1200.51	1.293.1201.51	15	1.293.1200.31	1.293.1201.31
M12 x 1.5	3 – 6.5	7	54	15/15	1.5	8	1.293.1200.50	1.293.1201.50	15	1.293.1200.30	1.293.1201.30
M16 x 1.5	2 – 6	8.5	63	19/19	2	8	1.293.1600.51	1.293.1601.51	15	1.293.1600.31	1.293.1601.31
M16 x 1.5	3 – 7	10.5	78	22/22	2.5	8	1.294.1600.51	1.294.1601.51	15	1.294.1600.31	1.294.1601.31
M16 x 1.5	4 – 8	8.5	63	19/19	2	8	1.293.1600.50	1.293.1601.50	15	1.293.1600.30	1.293.1601.30
M16 x 1.5	5 – 10	10.5	78	22/22	3	8	1.294.1600.50	1.294.1601.50	15	1.294.1600.30	1.294.1601.30
M20 x 1.5	5 – 9	13	90	24/24	3	9	1.293.2000.51	1.293.2001.51	15	1.293.2000.31	1.293.2001.31
M20 x 1.5	6 – 12	13	90	24/24	4.5	9	1.293.2000.50	1.293.2001.50	15	1.293.2000.30	1.293.2001.30
M20 x 1.5	7 – 12	15.5	100	27/27	3.5	9	1.294.2000.51	1.294.2001.51	15	1.294.2000.31	1.294.2001.31
M20 x 1.5	10 – 14	15.5	100	27/27	4.5	9	1.294.2000.50	1.294.2001.50	15	1.294.2000.30	1.294.2001.30
M25 x 1.5	9 – 16	20	114	33/33	4	11	1.293.2500.51	1.293.2501.51	15	1.293.2500.31	1.293.2501.31
M25 x 1.5	13 – 18	20	114	33/33	5	11	1.293.2500.50	1.293.2501.50	15	1.293.2500.30	1.293.2501.30
PG 7	2 – 5	7	54	15/15	1.5	8	1.293.0700.15	1.293.0701.15	15	1.293.0700.61	1.293.0701.61
PG 7	3 – 6.5	7	54	15/15	1.5	8	1.293.0700.14	1.293.0701.14	15	1.293.0700.60	1.293.0701.60
PG 9	2 – 6	8.5	63	19/19	2	8	1.293.0900.15	1.293.0901.15	15	1.293.0900.61	1.293.0901.61
PG 9	4 – 8	8.5	63	19/19	2	8	1.293.0900.14	1.293.0901.14	15	1.293.0900.60	1.293.0901.60
PG 11	3 – 7	10.5	78	22/22	2.5	8	1.293.1100.15	1.293.1101.15	15	1.293.1100.61	1.293.1101.61
PG 11	5 – 10	10.5	78	22/22	3	8	1.293.1100.14	1.293.1101.14	15	1.293.1100.60	1.293.1101.60
PG 13.5	5 – 9	13	90	24/24	3	9	1.293.1300.15	1.293.1301.15	15	1.293.1300.61	1.293.1301.61
PG 13.5	6 – 12	13	90	24/24	4.5	9	1.293.1300.14	1.293.1301.14	15	1.293.1300.60	1.293.1301.60
PG 16	7 – 12	15.5	100	27/27	3.5	10	1.293.1600.15	1.293.1601.15	15	1.293.1600.61	1.293.1601.61
PG 16	10 – 14	15.5	100	27/27	4.5	10	1.293.1600.14	1.293.1601.14	15	1.293.1600.60	1.293.1601.60
PG 21	9 – 16	20	114	33/33	4	11	1.293.2100.15	1.293.2101.15	15	1.293.2100.61	1.293.2101.61
PG 21	13 – 18	20	114	33/33	5	11	1.293.2100.14	1.293.2101.14	15	1.293.2100.60	1.293.2101.60



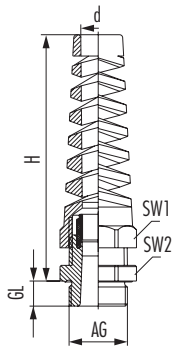

Material	Polyamide
Seal	NBR
Protection class	IP 68 – 10 bar / IP 69 K with additional o-ring
Temperature range	-40°C to +100°C
Colour	grey / black
RAL	7035 / 9005

RoHS

- // With additional premounted O-ring on the connection thread on request
- // Other sealing material e.g. Silicone on request

AG	∅k mm	d mm	GL mm	H mm	SW1/SW2 mm	⊕ Nm	Item-No grey	Item-No black
NPT 3/8"	2 – 6	8.5	15	63	22/19	2	1.293.3800.71	1.293.3801.71
NPT 3/8"	4 – 8	8.5	15	63	22/19	2	1.293.3800.70	1.293.3801.70
NPT 1/2"	5 – 9	13	13	90	24/24	3	1.293.1200.71	1.293.1201.71
NPT 1/2"	6 – 12	13	13	90	24/24	4.5	1.293.1200.70	1.293.1201.70
NPT 1/2"	7 – 12	15.5	13	100	27/27	3.5	1.293.1216.71	1.293.1217.71
NPT 1/2"	10 – 14	15.5	13	100	27/27	4.5	1.293.1216.70	1.293.1217.70
NPT 3/4"	9 – 16	20	14	114	33/33	4	1.293.3400.71	1.293.3401.71
NPT 3/4"	13 – 18	20	14	114	33/33	5	1.293.3400.70	1.293.3401.70

