



Plug V-N-Ms (metric, PG)

Material	Nickel-plated brass
Protection class	IP 54



RoHS

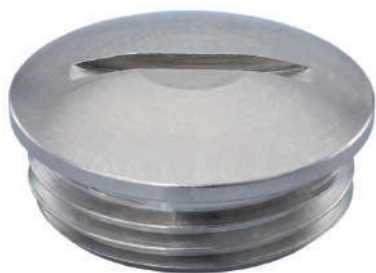

AG	D mm	GL mm	H mm	Item-No
M12 x 1.5	14	5	7.5	1.052.1200.50
M16 x 1.5	18	5	8	1.052.1600.50
M20 x 1.5	22	6.5	9.5	1.052.2000.50
M25 x 1.5	28	7	11	1.052.2500.50
M32 x 1.5	35	8	12	1.052.3200.50
M40 x 1.5	45	8.1	13	1.052.4000.50
M50 x 1.5	54	9	15	1.052.5000.50
M63 x 1.5	67	10	16	1.052.6300.50
PG 7	14	5	8	1.052.0700.01
PG 9	17	6	9	1.052.0900.01
PG 11	20	6	9	1.052.1100.01
PG 13.5	22	6.5	9.5	1.052.1300.01
PG 16	24	6.5	9.5	1.052.1600.01
PG 21	30	7	11	1.052.2100.01
PG 29	39	8	12	1.052.2900.01
PG 36	50	9	15	1.052.3600.01
PG 42	57	10	16	1.052.4200.01
PG 48	64	10	16	1.052.4800.01

Accessories

Plug V-N-Ms-SD (metric, PG)

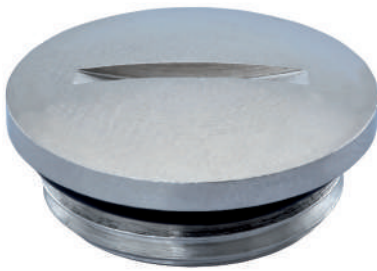


Material	Nickel-plated brass
Material o-ring	NBR
Protection class	IP 68 – 10 bar / IP 69 K
Temperature range	-40°C to +80°C

RoHS

// Other O-Ring materials on request

AG	D mm	GL mm	H mm	Item-No
M12 x 1.5	14	6.5	9.5	1.052.1201.50
M16 x 1.5	20	6	9	1.052.1601.50
M20 x 1.5	24	6.5	9.5	1.052.2001.50
M25 x 1.5	28	7	11	1.052.2501.50
M32 x 1.5	35	8	12.5	1.052.3201.50
M40 x 1.5	45	8	12	1.052.4001.50
M50 x 1.5	55	9	15	1.052.5001.50
M63 x 1.5	68	10	16	1.052.6301.50
PG 7	14	4.8	8	1.052.0701.01
PG 9	17	5.5	9	1.052.0901.01
PG 11	20	5.5	9	1.052.1101.01
PG 13.5	22	6	9.5	1.052.1301.01
PG 16	24	6	9.5	1.052.1601.01
PG 21	30	6.5	11	1.052.2101.01
PG 29	39	7.5	12	1.052.2901.01
PG 36	50	9	15	1.052.3601.01
PG 42	57	10	16	1.052.4201.01
PG 48	64	10	16	1.052.4801.01

Plug V-NE-Ms (metric, PG)



Material Nickel-plated brass

RoHS

Protection class IP 54


- // Without o-ring
- // NPT thread on request
- // Elongated threads on request

AG	GL mm	H mm	SW mm	Item-No
M12 x 1.5	6.5	9.5	14	1.155.1200.50
M16 x 1.5	6	9	19	1.155.1600.50
M20 x 1.5	6	9.5	22	1.155.2000.50
M25 x 1.5	7	10.5	30	1.155.2500.50
M32 x 1.5	8	12.5	41	1.155.3200.50
M40 x 1.5	8	13	46	1.155.4000.50
M50 x 1.5	9	15	55	1.155.5000.50
M63 x 1.5	10	16.5	70	1.155.6300.50
PG 7	5	8	14	1.155.0700.01
PG 9	6	9	17	1.155.0900.01
PG 11	6	9.5	20	1.155.1100.01
PG 13.5	6.5	10	22	1.155.1300.01
PG 16	6.5	10	24	1.155.1600.01
PG 21	7	10.5	30	1.155.2100.01
PG 29	8	12.5	41	1.155.2900.01
PG 36	8	13	50	1.155.3600.01
PG 42	9	15	58	1.155.4200.01
PG 48	10	16.5	65	1.155.4800.01



Accessories

Plug V-NE-Ms-SD (metric, PG)



Material	Nickel-plated brass
Material o-ring	NBR / FKM
Protection class	IP 68 – 10 bar / IP 69 K
Temperature range	-20°C to +95°C / -20°C to +180°C

RoHS

- // NPT thread on request
- // Elongated threads on request
- // Other O-Ring materials on request

AG	GL mm	H mm	SW mm	Item-No NBR	Item-No FKM
M12 x 1.5	6.5	9.5	14	1.156.1200.50	1.157.1200.50
M16 x 1.5	6	9	19	1.156.1600.50	1.157.1600.50
M20 x 1.5	6	9.5	22	1.156.2000.50	1.157.2000.50
M25 x 1.5	7	10.5	30	1.156.2500.50	1.157.2500.50
M32 x 1.5	8	12.5	41	1.156.3200.50	1.157.3200.50
M40 x 1.5	8	13	46	1.156.4000.50	1.157.4000.50
M50 x 1.5	9	15	55	1.156.5000.50	1.157.5000.50
M63 x 1.5	10	16.5	70	1.156.6300.50	1.157.6300.50
PG 7	5	8	14	1.156.0700.01	1.157.0700.01
PG 9	6	9	17	1.156.0900.01	1.157.0900.01
PG 11	6	9.5	20	1.156.1100.01	1.157.1100.01
PG 13.5	6.5	10	22	1.156.1300.01	1.157.1300.01
PG 16	6.5	10	24	1.156.1600.01	1.157.1600.01
PG 21	7	10.5	30	1.156.2100.01	1.157.2100.01
PG 29	8	12.5	41	1.156.2900.01	1.157.2900.01
PG 36	8	13	50	1.156.3600.01	1.157.3600.01
PG 42	9	15	58	1.156.4200.01	1.157.4200.01
PG 48	10	16.5	65	1.156.4800.01	1.157.4800.01

