



Thread seal ring made of polyethylene

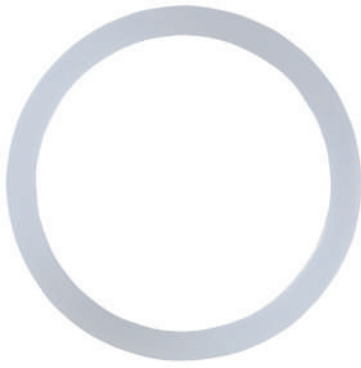

Material	Polyethylene
Temperature range	-30°C to +70°C

RoHS

Suitable for AG	d mm	D mm	s mm	Item-No
M12 x 1.5	12	16	2	1.325.1200.59
M16 x 1.5	16	20	2	1.325.1600.59
M20 x 1.5	20	25	2	1.325.2000.59
M25 x 1.5	25	31	2	1.325.2500.59
M32 x 1.5	32	38	2	1.325.3200.59
M40 x 1.5	40	52.7	2	1.325.4000.59
M50 x 1.5	50	58	2	1.325.5000.59
M63 x 1.5	63	72	2	1.325.6300.59
PG 7	12.5	16.5	2	1.325.0700.19
PG 9	15.2	19	2	1.325.0900.19
PG 11	18.6	22.5	2	1.325.1100.19
PG 13.5	20.4	25	2	1.325.1300.19
PG 16	22.5	27	2	1.325.1600.19
PG 21	28.3	33.5	2	1.325.2100.19
PG 29	37	43.5	2	1.325.2900.19
PG 36	47	55	2	1.325.3600.19
PG 42	54	63	2	1.325.4200.19
PG 48	59.3	69	2	1.325.4800.19

Thread seal ring made of fibre composite material



Material	Fiber composite
Temperature range	-50°C to +250°C

RoHS

Suitable for AG	d mm	D mm	s mm	Item-No
M12 x 1.5	12	16	2	1.325.1200.50
M16 x 1.5	16	20	2	1.325.1600.50
M20 x 1.5	20	25	2	1.325.2000.50
M25 x 1.5	25	31	2	1.325.2500.50
M32 x 1.5	32	38	2	1.325.3200.50
M40 x 1.5	40	48	2	1.325.4000.50
M50 x 1.5	50	58	2	1.325.5000.50
M63 x 1.5	63	72	2	1.325.6300.50
PG 7	12.5	16.5	1.5	1.325.0700.20
PG 9	15.2	19	1.5	1.325.0900.20
PG 11	18.6	22.5	1.5	1.325.1100.20
PG 13.5	20.4	25	1.5	1.325.1300.20
PG 16	22.5	27	1.5	1.325.1600.20
PG 21	28.3	33.5	2	1.325.2100.20
PG 29	37	43.5	2	1.325.2900.20
PG 36	47	55	2	1.325.3600.20
PG 42	54	63	2	1.325.4200.20
PG 48	59.3	69	2	1.325.4800.20